Rubber-lined SMS P-Clip

W1

Galvanized

SMS P-Clip W1

Information

Mikalor SMS P-Clips are ideal for attaching and retaining cable conduits, hoses and tubes in construction, sanitary and particularly in automotive applications. They are widely used in agricultural machinery, boat-building, commercial vehicles, construction equipment etc.
The anti-vibration EPDM rubber profile means that pipes, hoses and conduits are held firmly in place without chafing or damage to the clamping area.

In contrast to DIN 3016 P-Clips, SMS P-Clips have one round hole and one oval hole. This unique feature allows for certain flexibility when fixing these clips in place.

Mikalor SMS P-Clips are available in two bandwidths. 12,7mm (with an M6 hole) and 15,9mm (with an M8 hole). Special dimensions, material qualities and rubber types are available on request, subject to minimum order quantities.

Reference 12,7 mm	D +/- 0,4	E +/- 0,4	T +/- 0,1	Reference 15,9 mm	D +/- 0,4	E +/- 0,4	T +/- 0,1
03024990	3,2	14,6	0,8	03025600	6,4	16,2	0,8
03025007	4,8	15,4	0,8	03025611	7,9	17,0	0,8
03025015	6,4	16,2	0,8	03025622	9,5	17,8	0,8
03025022	7,9	17,0	0,8	03025633	11,1	18,6	0,8
03025066	9,5	17,8	0,8	03025644	12,7	19,4	1,0
03025069	11,1	18,6	0,8	03025655	14,3	20,2	1,0
03025077	12,7	19,4	1,0	03025666	15,9	21,0	1,0
03025090	14,3	20,2	1,0	03025677	17,5	21,8	1,0
03025106	15,9	21,0	1,0	03025688	19	22,6	1,0
03025122	17,5	21,8	1,0	03025699	20,6	23,4	1,0
03025144	19	22,8	1,0	03025700	22,2	24,2	1,0
03025155	20,6	23,4	1,0	03025711	23,8	25,0	1,0
03025169	22,2	24,2	1,0	03025722	25,4	25,8	1,0
03025185	23,8	25,0	1,0	03025733	27	27,1	1,2
03025177	25,4	25,8	1,0	03025966	28,6	27,9	1,2
03025225	27	27,1	1,2	03025744	30,2	28,6	1,2
03025235	28,6	27,9	1,2	03025755	31,8	29,4	1,2
03025255	30,2	28,6	1,2	03025766	33,3	30,2	1,2
03025266	31,8	29,4	1,2	03025777	34,9	31,0	1,2
03025274	33,3	30,2	1,2	03025788	36,5	31,8	1,2
03025293	34,9	31,0	1,2	03025799	38,1	32,6	1,2
03025310	36,5	31,8	1,2	03025811	41	34,0	1,2
03025330	38,1	32,6	1,2	03025833	45	36,0	1,2
03025360	41	34,0	1,2	03025844	47	36,5	1,2
03025390	44,5	36,0	1,2	03025855	51	39,0	1,2
03025422	47	36,5	1,2	03025866	54	41,5	1,2
03025466	51	39,0	1,2	03025877	60	43,5	1,2
03025499	54	41,5	1,2	03025888	64	46,1	1,2
03025366	60	43,5	1,2	03025899	75	50,0	1,2
03025377	65	46,1	1,2	03025900	110	68,0	1,2
03025477	74	50,0	1,2				
03025480	82	58,50	1,2				
03025500	110	68,0	1,2				

W1 Materials

Band:
Hot Dip Galvanized steel (DX51)
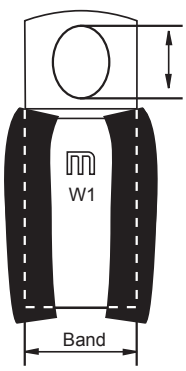
Finish:
Galvanized and lined with EPDM rubber