

OETIKER SV 2-Stage


DN6 with plastic release ring




Original size

Quick Action Coupling


with female thread

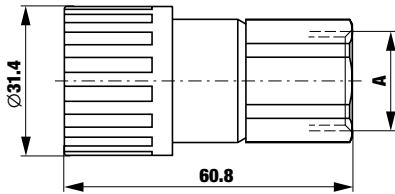

with male thread

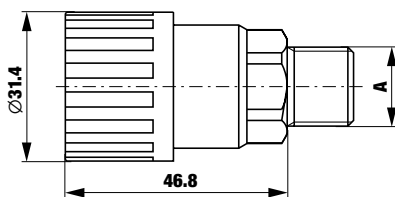


with hose stem

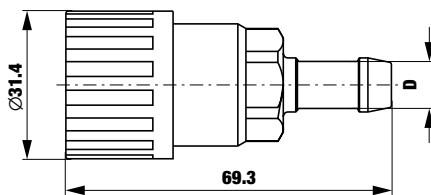


Plug


with male thread



with female thread



with hose stem



A	Steel
G1/8	203 00 180
G1/4	203 00 181
G3/8	203 00 182
G1/2	203 00 183

G1/4	203 00 186
G3/8	203 00 184
G1/2	203 00 185

D	Steel
6 mm 1/4"	203 00 190
8 mm 5/16"	203 00 187
10 mm 3/8"	203 00 188
13 mm 1/2"	203 00 189

A	Steel
G1/8	255 00 093
G1/4	255 00 091
G3/8	255 00 092

G1/8	255 00 100
G1/4	255 00 088

D	Steel
6 mm 1/4"	255 00 113
8 mm 5/16"	255 00 114
10 mm 3/8"	255 00 115
13 mm 1/2"	255 00 116

Features

- In accordance with safety standard ISO 4414, EN 983
- Model to ISO 6150-C-10 and AFNOR: C-10 NF E 49-053
- Safety feature: 2-stage disconnection
- Simple operation
- CE

Application

Media

Compressed air, gases, liquids and low viscosity media.

Operating Pressure

Up to 25 bar, (dis-) connection up to 15 bar. Also suitable for technical vacuum up to ca. 100 mbar.

Temperature Range

-20°C up to +100°C (NBR).

Materials, Seals

When chemically aggressive media are used OETIKER should be consulted in your choice of housing and seal – or you might conduct tests of your own (see pages 25/26).

Function

Seals on both sides with plug with check valve (see page 9).

Procedure

(Dis-) connection see page 4.

